

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
15 June 2006 (15.06.2006)

PCT

(10) International Publication Number  
**WO 2006/062223 A1**

(51) International Patent Classification:  
**F04B 39/00** (2006.01)

(21) International Application Number:

PCT/JP2005/022725

(22) International Filing Date:

6 December 2005 (06.12.2005)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

2004-352446

6 December 2004 (06.12.2004) JP

(71) Applicant (for all designated States except US): MATSUSHITA ELECTRIC INDUSTRIAL CO., LTD. [JP/JP]; 1006, Oaza Kadoma, Kadoma-shi, Osaka, 5718501 (JP).

(72) Inventors; and

(75) Inventors/Applicants (for US only): INAGAKI, Ko. KOBAYASHI, Masanori. IDE, Terumasa. MARUYAMA, Tomio.

(74) Agents: IWAHASHI, Fumio et al.; c/o Matsushita, Electric Industrial Co., Ltd., 1006, Oaza Kadoma, Kadoma-shi, Osaka, 5718501 (JP).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, KE, KG, KM, KN, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, LY, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.


(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

[Continued on next page]

(54) Title: HERMETIC COMPRESSOR

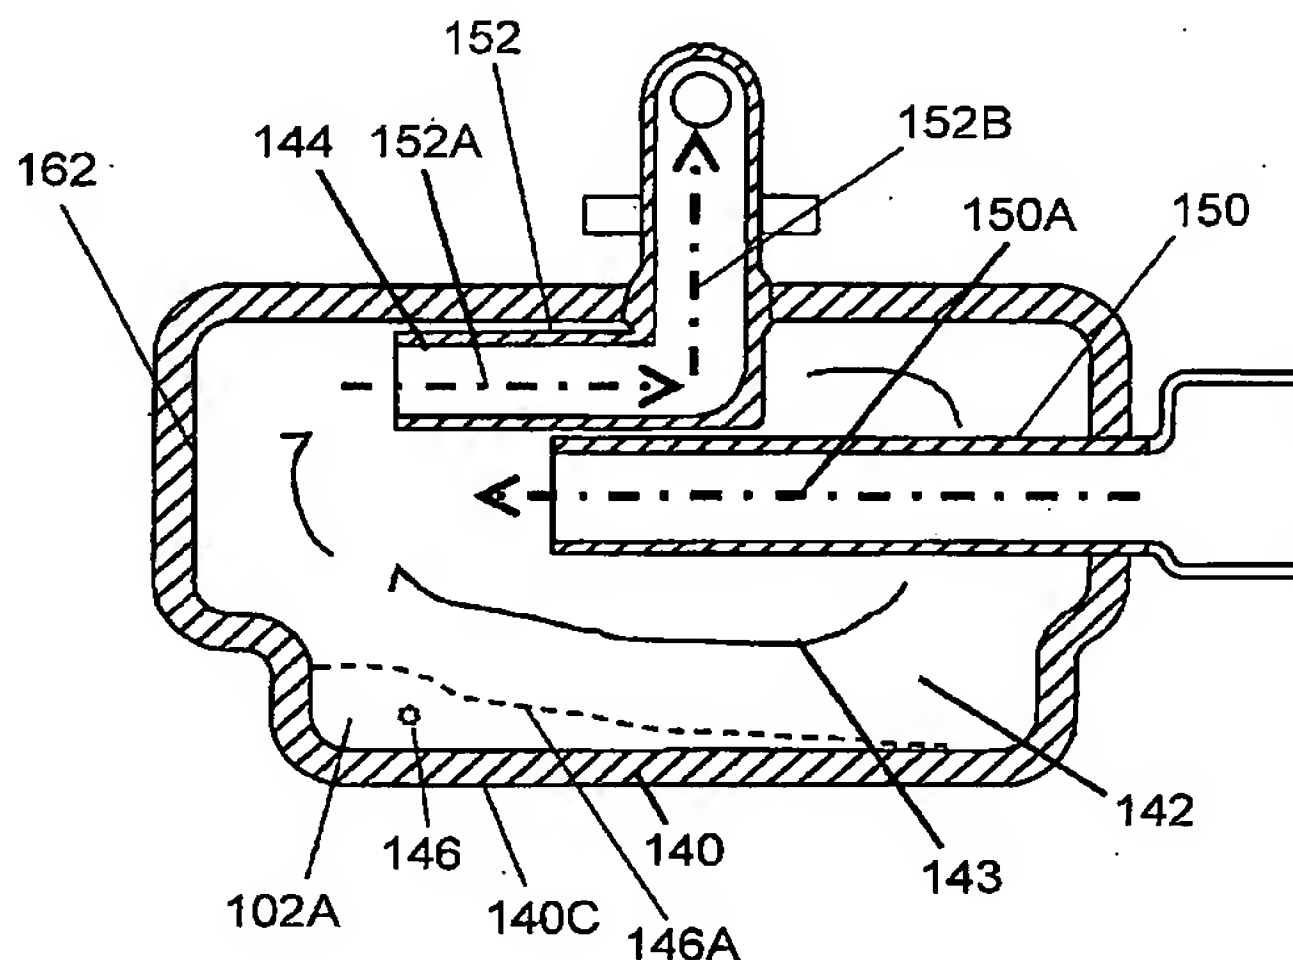

(57) Abstract: A hermetic compressor has a hermetic container storing an oil, and a compressing element accommodated in the hermetic container and compressing a refrigerant gas; the compressing element has a compressing chamber, a cylinder forming the compressing chamber, a piston inserted into the cylinder and reciprocating, and a suction muffler (140) whose one end communicates with the compressing chamber; and the suction muffler (140) has a sound deadening space (142), a gas flow forming part (144) forming a gas flow (143) flowing in a constant direction in the sound deadening space (142), and an oil discharged opening (146) provided in a downstream side of the gas flow (143) in a lower part of the sound deadening space (142). By this constitution, there is realized the hermetic compressor in which the oil is more difficult to remain in the suction muffler (140), whose noise is lower, and whose performance is stabilized.

WO 2006/062223 A1



---

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*